



# Alpha Slimline series

## ASU-60-12U, 12V-60W Class 2 Power Supply

Signage & Lighting LED Drivers.




### features

- Single channel 60W, 12V DC Output, Class 2 UL
- 120-277VAC 50/60HZ True Universal Input
- Compact and Slim Design to fit in raceways and cabinets
- Pig-tail to Pig-tail leads
- Dry and damp Listed
- Full load at 60°C (140°F)
- Over-Current, Short Circuit, Over Voltage Protection Features
- Made in North America
- UL & CSA Recognized under Sign Accessories
- 5-year Warranty

### installation

- This unit is intended for installation inside an electrical enclosure.
- Class 2 wiring per NEC Article 725 is required.

### dimension

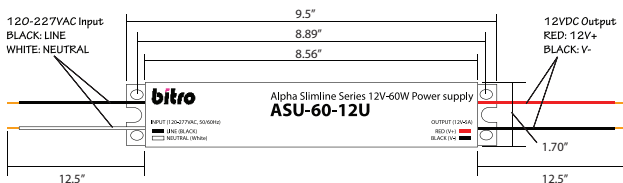

### overview

Bitro Alpha Slimline Series (ASU Series) power supplies are designed for LED lighting in signage and architectural applications. Bitro ASU power supplies are compact, durably constructed, and weather proofed for use in demanding environments. True universal input voltage, consistent DC output, high Power Factor, and 5 warranty make Bitro ASU Series power supplies a unique choice for reliable everyday power source for LED lighting. ASU Series power supplies are manufactured in North America for availability and quick lead time.

### specifications

Model # / SKU	ASU-60-12U
Description	12V-60W LED Power Supply
Input Voltage	120-277VAC
Input Current, Max (A)	0.58A/120V 0.26A/277V
Input Frequency (Hz)	50-60Hz
Efficiency	>85%
Output Voltage (V)	12VDC ± 10%
Output Current Range (A)	5.0 Amp Max
Output Power Max (W)	60 Watts
Protection	Over voltage, Over current, and short circuit
EMI and RFI	Meets FCC Part 15 (Class A)
Load Regulation	±5%
Operating Temperature*	-40°F to 134°F (-40°C to 57°C)
Storage temperature	-40°F to 176°F (-40°C to 80°C)

### Enclosure Dimensions

Length	9.50" (241.3mm)
Width	1.70" (43.2mm)
Height	1.18" (30.0mm)
Mounting Length	8.89" (225.8mm)
Weight	1.7 lbs

### Lead Lengths

Input Leads Black, White	12.5" (317.5mm) 18 AWG, Solid, 105°/660V
Output Leads Red, Black	12.5" (317.5mm) 18 AWG, Solid, 105°/660V



5-YEAR WARRANTY

